


DuraPass insulated & uninsulated side hinged double garage door and insulated single personnel door

DIMENSIONS & ORDERING

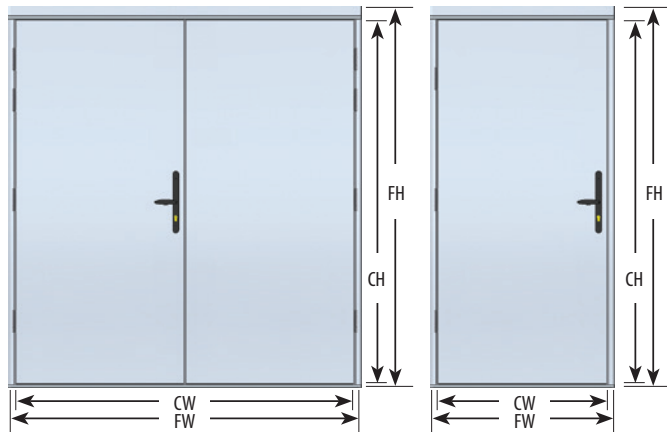

FW Frame width

CW Clear passage width* = FW - 140mm single leaf & - 170mm double leaf

FH Frame height

CH Clear passage height = FH - 72mm For standard 15mm open out low profile threshold

CH Clear passage height = FH - 80mm For standard open in threshold and double leaf doors

CH Clear passage height = FH - 87mm For optional 30mm threshold

*Exclude handle protrusion

To order specify:

Ordering size: No fitting clearance allowed. Garage Door Systems recommends allowing 10mm in width and 10mm in height when fitting between brickwork. Example: For a 1000mm x 2100mm structural opening order 990mm x 2090mm. See Garage Door Systems Survey/Order form for full details.

Handing: Single Doors: hinged on the left or right as viewed from the outside.

Leading Leaf: Double Doors: Right hand leading (standard) or Left hand leading as viewed from the outside.

Opening: Outward only - double doors. Outward or inward - single doors, As viewed from the outside.

Threshold: Standard threshold options for single and double leaf doors as details shown right.

If your door is supplied with protective film it must not be exposed to direct sunlight as this can lead to it baking on to the door. If storing doors outside please pay particular attention to this consequence. Protective film must be removed immediately following installation.

EXAMPLE DOOR LEAF SIZES FOR 50:50 AND ASYMMETRIC DOUBLE DOORS

On asymmetric doors the leading leaf width is fixed at 1000mm

****Uninsulated doors are available in made to measure sizes but not available with an asymmetric split.**

For door sizes between 1200mm and 1585mm width, please contact Garage Door Systems to discuss design options.

50:50 or asymmetric split doors				50:50 split doors only			
Asymmetric split door over frame size**							
1585mm	1800mm	1900mm					
475	690	790	1000	690	790	1000	1000

50:50 split door over frame size							
1585mm	1800mm	1900mm	2000mm	2100mm	2200mm	2300mm	
738	845	895	945	995	1045	1095	
738	845	895	945	995	1045	1095	

SIZE AVAILABILITY MADE TO MEASURE

Single Leaf **Insulated & Uninsulated** Doors (open in or open out)

Min Overframe Width = 790mm Max Overframe Width = 1210mm
Min Overframe Height = 1785mm Max Overframe Height = 2400mm

Double Leaf **Insulated & Uninsulated** Doors (open out only)


Min Overframe Width = 1200mm Max Overframe Width = 2300mm
Min Overframe Height = 1700mm Max Overframe Height = 2400mm

Double Leaf **Uninsulated** Doors

(open out only) Standard sizes:
Also available made to measure, as shown in the table above.


Nominal	Over Frame
6'8.5" x 6'3"	2146 x 1971
7'0" x 6'4"	2234 x 1991
7'0" x 6'6"	2234 x 2041
7'0" x 7'0"	2234 x 2196
7'2.5" x 6'3"	2298 x 1971
7'2.5" x 6'6"	2300 x 2041

THRESHOLD INSULATED DOUBLE DOORS




Standard open out ramped threshold

THRESHOLDS SINGLE DOORS

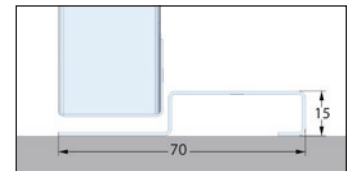


Standard open out 15mm low profile threshold

THRESHOLD UNINSULATED DOUBLE DOORS




Standard 30mm open out rebated threshold (Optional on insulated doors, must be specified if required)

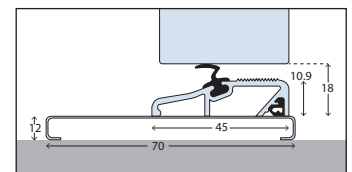

Standard inward opening threshold

FRAME DETAIL

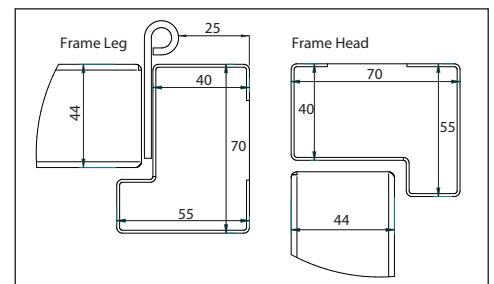

IMPORTANT!

DuraPass door frame and door leaf components are manufactured to a tolerance of ± 2.0mm

Sizes illustrated are selected examples - all doors are made to measure.

The minimum door leaf width that can be supplied with a stay is 450mm.

Doors are available with left or right leading leaf at no extra cost.

Fitting note: To minimise the ingress of rain run-off between the foot of the door leaf and the door threshold consideration must be given the floor surface to which the door is fitted ensuring that water is able to drain freely away. This particularly important on inward opening single doors - see brochure for details.