

## DURAROLL ROLLER GARAGE DOORS Measurements - viewed from inside the garage

Typical minimum headroom needed




For an 8'0" (2438mm) wide x 7'0" (2134mm) high door

Typical minimum sideroom needed



95mm (125mm required for automation at one side)

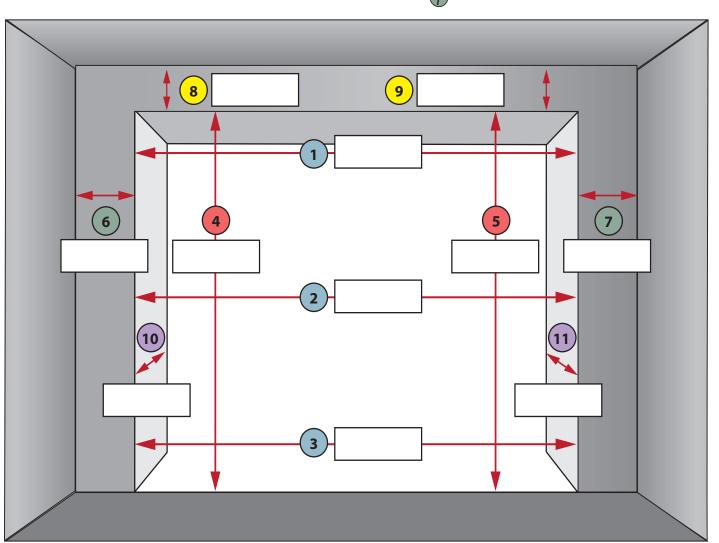

- 1 Width brick to brick top
- 2 Width brick to brick middle
- 3 Width brick to brick bottom
- 4 Height lintel to floor left
- **5** Height lintel to floor right
- 6 Side room left
- Side room right
- 8 Headroom left
- 9 Headroom right
- 10 Reveal depth left
- 11 Reveal depth right